BEGA

Pillar luminaire » Straßburg «

Project · Reference number

Product data sheet

Application

Luminaire for installation on pillars, walls or parapets for interior and exterior applications. Luminaire with hand-blown crystal bubble glass for brilliant light.

Product description

Luminaire made of aluminium alloy and stainless steel BEGA Unidure® coating technology Crystal bubble glass Mounting plate with 3 fixing holes ø 8.5 mm Angle 120° · Pitch circle ø 100mm Mounting bracket with 2-pole terminal block $4^{\scriptscriptstyle \Box}$ and earth conductor terminal for connection of mains supply cable max. $3 \times 2.5^{\Box}$ Lampholder E 27 Safety class I Protection class IP 44 Protected against granular foreign bodies ≥ 1 mm and splash water 🔏 🗠 – Safety mark **CE** – Conformity mark Weight: 4.8 kg

Lighting technology

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at www.bega.com.

Lamp

Luminaire with screw base E 27 Lamp output max. 100 W This product contains light source of energy efficiency class E

Supplied lamp BEGA LED lamp 13584 A 60 7 W · 805 lm · 3000 K

Luminaire efficiency: 57%

Additional BEGA LED lamps are available for this luminaire:

13 586	LED 7 W · 805 lm · 3000 K
	dimmable
13 588	LED 8 W · 1055 lm · 3000 K


13 590 LED 12 W · 1400 lm · 3000 K

13 592 LED 12 W · 1400 lm · 3000 K


dimmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.



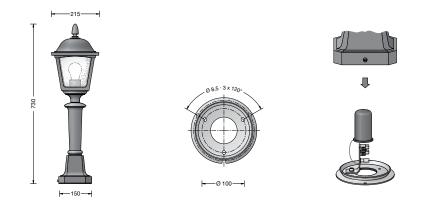

Date

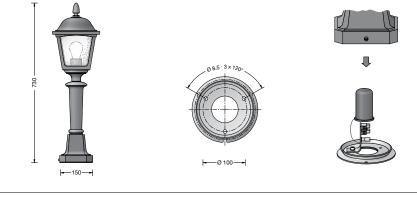

10 🖄 IP 44