

**BEGA****31 201**

Wall luminaire



Project · Reference number

Date

## Product data sheet

### Application

Wall luminaire for many lighting tasks on or in buildings.  
Ideal for places where a soft and uniform light distribution is required.

### Product description

Luminaire made of aluminium and stainless steel  
BEGA Unidure® coating technology  
Opal glass  
Silicone gasket  
Mounting plate with 2 fixing holes  $\varnothing$  4.8 mm · 40 mm spacing  
1 cable entry for mains supply cable up to  $\varnothing$  10,5 mm  
Connection terminal 2.5<sup>□</sup>  
Earth conductor connection  
Lampholder E 14  
Safety class I  
Protection class IP 44  
Protected against granular foreign bodies  $\geq$  1 mm and splash water  
Impact strength IK06  
Protection against mechanical impacts < 1 joule  
 – Safety mark  
**CE** – Conformity mark  
Weight: 1.0 kg

### Lamp

Luminaire with screw base E 14  
Lamp output max. 40 W  
This product contains light source of energy efficiency class E

### Supplied lamp


BEGA LED lamp **13 594**  
LED Retrofit 4 W · 470 lm · 3000 K

Luminaire efficiency: 48%

Additional BEGA LED lamps are available for this luminaire:

**13 596** LED 4,5 W · 470 lm · 3000 K  
dimmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

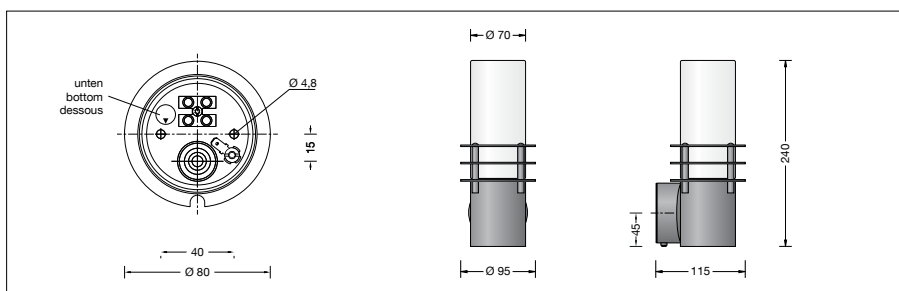

### Article No. 31 201

Colour graphite or bronze  
graphite – article number  
bronze – article number + **B**