

**BEGA****55 453**

Wall luminaire



Project · Reference number


Date

## Product data sheet

### Application

Wall luminaire for many lighting tasks on or in buildings.  
Ideal for places where a soft and uniform light distribution is required.

### Product description

Luminaire made of aluminium alloy and stainless steel  
BEGA Unidure® coating technology  
Opal glass  
2 mounting holes  $\varnothing$  5.2 mm  
Distance apart 70 mm  
1 cable entry for mains supply cable up to  $\varnothing$  10,5 mm  
Connecting terminal 2.5<sup>□</sup> with plug connection  
Earth conductor connection  
Lampholder E 27  
Safety class I  
Protection class IP 44  
Protected against granular foreign bodies  $\geq$  1 mm and splash water  
Impact strength IK02  
Protection against mechanical impacts  $<$  0.2 joule  
 – Safety mark  
**CE** – Conformity mark  
Weight: 1.4 kg

### Lamp

Luminaire with screw base E 27  
Lamp output max. 75 W  
This product contains light source of energy efficiency class E


Supplied lamp  
BEGA LED lamp **13584**  
LED Retrofit 7 W · 805 lm · 3000 K

Luminaire efficiency: 83%

Additional BEGA LED lamps are available for this luminaire:

- 13586** LED 7 W · 805 lm · 3000 K dimmable
- 13588** LED 8 W · 1055 lm · 3000 K
- 13590** LED 12 W · 1400 lm · 3000 K
- 13592** LED 12 W · 1400 lm · 3000 K dimmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

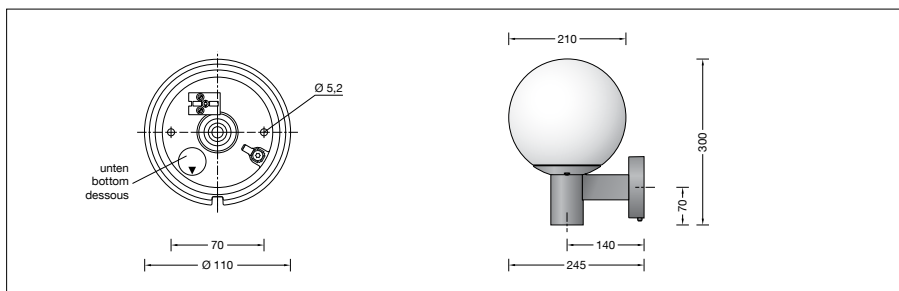

### Lighting technology

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at [www.bega.com](http://www.bega.com).

### Accessory

**10409** Corner block  
Corner block for installation of wall lights on a house corner.

A separate instructions for use can be provided upon request.

### Article No. 55 453

Colour graphite or bronze  
graphite – article number  
bronze – article number + **B**