

BEGA**77 218**

Garden and pathway luminaire



Project · Reference number

Date

Product data sheet

Application

Garden and pathway luminaires with downward-directed light for effective lighting in private gardens.

Luminaire for the uniform and glare-free illumination of ground surfaces.

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel
 BEGA Unidure® coating technology
 Clear impact resistant synthetic diffuser with optical structure
 Silicone gasket
 Luminaire with anchorage unit for fixing in the soil
 The anchorage unit is made of galvanised steel according to EN ISO 1461
 Line connector for mains supply cable up to \varnothing 13 mm · max. 3 × 2,5[□]
 BEGA Ultimate Driver®
 LED power supply unit
 220-240 V \sim 0/50-60 Hz
 DC 176-264 V
 Safety class I
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK09
 Protection against mechanical impacts < 10 joule
 – Safety mark
CE – Conformity mark
 Weight: 3.0 kg

Inrush current

Inrush current: 7 A / 112 μ s
 Maximum number of luminaires of this type per miniature circuit breaker:

B 10A: 38 luminaires
 B 16A: 61 luminaires
 C 10A: 64 luminaires
 C 16A: 102 luminaires



Lamp

Module connected wattage	3.8 W
Luminaire connected wattage	4.9 W
Rated temperature	$t_a = 25$ °C
Ambient temperature	$t_{a, \max} = 60$ °C

77 218 K3

Module designation	2x LED-0181/830
Colour temperature	3000 K
Colour rendering index	CRI > 80
Module luminous flux	760 lm
Luminaire luminous flux	365 lm
Luminaire luminous efficiency	74,5 lm/W

Light distribution

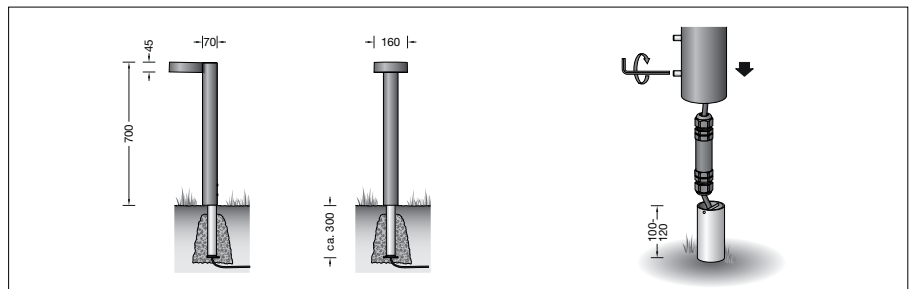

Service life · Ambient temperature

Rated temperature $t_a = 25$ °C	
LED psu:	> 50,000 h
LED module:	> 200,000 h (L 80 B 50) > 100,000 h (L 90 B 50)
Ambient temperature $t_{a, \max} = 60$ °C (100 %)	
LED psu:	50,000 h
LED module:	150,000 h (L 80 B 50)

Lighting technology

Recommended light point interval 5 m
 Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at www.bega.com.

Article No. 77 218

Colour graphite or silver
 graphite – article number
 silver – article number + A

Accessories

Distribution box for installation in soil
70 730 Distribution box with 7 cable entries
 Connection terminals 5 × 4[□]
71 053 Distribution box with 10 cable entries
 Connection terminals 6 × 16[□]

See the separate instructions for use.