

BEGA**24 199**

Ceiling, wall and pillar luminaire



Project · Reference number

Date

Product data sheet**Application**

Shielded ceiling, wall and pillar luminaire with high protection class.

A luminaire made of aluminium alloy and impact resistant crystal glass with light diffusing structures.

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel

BEGA Unidure® coating technology

Crystal glass coated

2 mounting holes \varnothing 5.5 mm

Distance apart 144 mm

2 cable entries for through-wiring of mains

supply cable \varnothing 7-10.5 mm

Connection terminal 2.5²

Earth conductor connection

Lamp holder E 27

Safety class I

Protection class IP 65

Dust-tight and protection against water jets

Impact strength IK08

Protection against mechanical

impacts < 5 joule

– Safety mark

CE – Conformity mark

Weight: 2.7 kg

Lamp

Luminaire with screw base E 27

Lamp output max. 60 W

Supplied lamp

BEGA LED lamp **13584**

LED Retrofit 7 W · 805 lm · 3000 K

Luminaire efficiency: 47%

Additional BEGA LED lamps are available for this luminaire:

13586 LED 7 W · 805 lm · 3000 K
dimmable

13588 LED 8 W · 1055 lm · 3000 K

13590 LED 12 W · 1400 lm · 3000 K

13592 LED 12 W · 1400 lm · 3000 K
dimmable

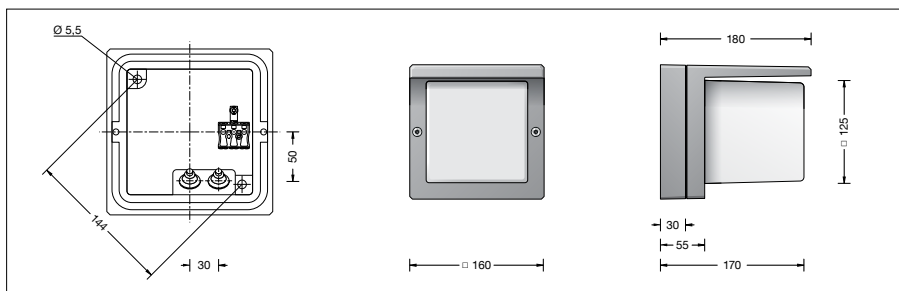

Radio-controlled version (Zigbee 3.0):

13555 LED 9 W · 805 lm · 2700 K
dimmable

13556 LED 9 W · 805 lm · 2700-6500 K
dimmable · tunable white

13557 LED 9.5 W · 805 lm · 2700-6500 K
dimmable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

Light distribution**Lighting technology**

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at www.bega.com.

Article No. 24 199

Colour graphite or silver
graphite – article number
silver – article number + **A**