

BEGA**84 319**

Garden and pathway luminaire



Project · Reference number

Date

Product data sheet

Application

Unshielded garden and path luminaire with safety guard. Light exit 180°. With hand-blown, three-ply opal glass and pleasantly uniform light effect for effective illumination in private gardens.

Product description

Luminaire made of cast aluminium, aluminium and stainless steel
 BEGA Unidure® coating technology
 Opal glass with screw neck
 Silicone gasket
 Luminaire with anchorage unit for fixing in the soil
 The anchorage unit is made of galvanised steel according to EN ISO 1461
 Mounting bracket with connection box and 3-pole terminal 4² for connection of mains supply cable max. 3 × 2.5²
 Lampholder E 27
 Safety class I
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK09
 Protection against mechanical impacts < 10 joule
 – Safety mark
 – Conformity mark
 Weight: 8.4 kg

Lamp

Luminaire with screw base E 27
 Lamp output max. 60 W
 This product contains light source of energy efficiency class E

Supplied lamp
 BEGA LED lamp **13588**
 LED Retrofit 8 W · 1055 lm · 3000 K

Luminaire efficiency: 12%

Additional BEGA LED lamps are available for this luminaire:

13510 LED 7 W · 805 lm · 2700 K
13548 LED 7 W · 805 lm · 2700 K dimmable

13584 LED 7 W · 805 lm · 3000 K
13586 LED 7 W · 805 lm · 3000 K dimmable

13512 LED 8 W · 1055 lm · 2700 K
13588 LED 8 W · 1055 lm · 3000 K


Radio-controlled version (Zigbee 3.0):

13555 LED 9 W · 805 lm · 2700 K dimmable

13556 LED 9 W · 805 lm · 2700-6500 K dimmable · tunable white

13557 LED 9.5 W · 805 lm · 2700-6500 K dimmable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

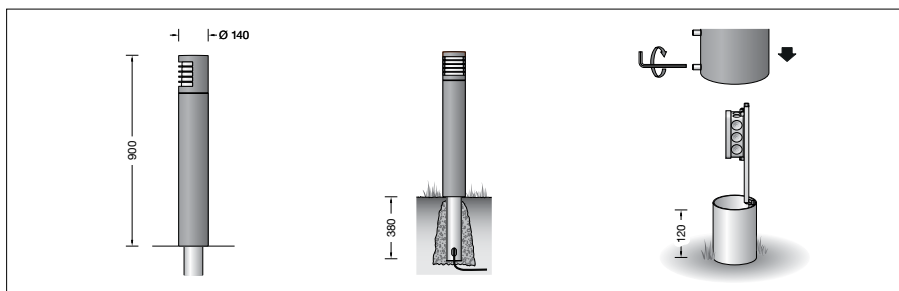

Ratio of luminous flux

Luminous flux upper half-space 51,3 %
 Luminous flux lower half-space 48,7 %

BUG rating according to IES TM-15-07:

0-2-1

CEN Flux Code according to EN 13032-2:
 1-16-51-49-12-1-17-52-51

Article No. 84 319

Colour graphite or silver
 graphite – article number
 silver – article number + **A**

Light distribution

