

**BEGA****31 263**

Wall luminaire



Project · Reference number

Date

## Product data sheet

### Application

Wall luminaire with shielded light source for many lighting tasks on or in buildings.

### Product description

Luminaire made of copper and stainless steel  
Opal glass with screw neck  
Silicone gasket  
Wall mounting with a mounting plate made of stainless steel, Steel grade number 1.4301  
Mounting plate with 2 fixing holes  $\varnothing$  5.5 mm · 70 mm spacing  
1 cable entry for mains supply cable up to  $\varnothing$  10,5 mm  
Connecting terminal 2.5<sup>□</sup> with plug connection  
Earth conductor connection  
Lampholder E 27  
Safety class I  
Protection class IP 44  
Protected against granular foreign bodies  $\geq$  1 mm and splash water  
Impact strength IK05  
Protection against mechanical impacts < 0.7 joule  
 – Safety mark  
**CE** – Conformity mark  
Weight: 1.6 kg

### Lamp

Luminaire with screw base E 27  
Lamp output max. 60 W  
This product contains light source of energy efficiency class E

### Supplied lamp


BEGA LED lamp **13584**  
LED Retrofit 7 W · 805 lm · 3000 K

Luminaire efficiency: 35%

Additional BEGA LED lamps are available for this luminaire:

**13586** LED 7 W · 805 lm · 3000 K  
dimmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

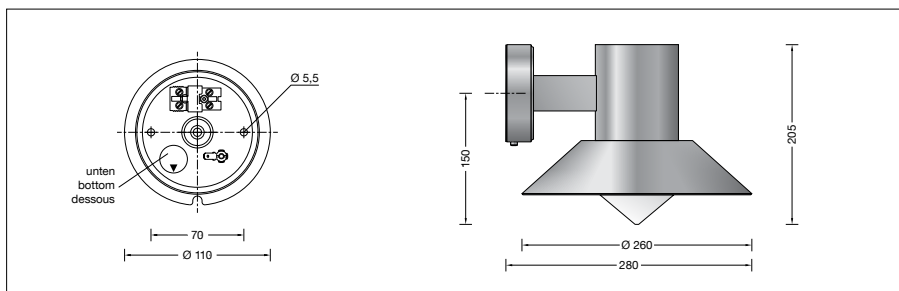

### Light technique

Part of the light shines upwards through a slit in the reflector shield.  
The shape of the luminaire thus remains visible, even in the dark.

### Copper

The luminaire parts made of solid copper are delivered with the metal's natural surface colour. Time and weather factors create the natural patina characteristic for copper.